


Open-Air-Stage Senftenberg



The new membrane roofing of the amphitheater at Senftenberger See will be finished in good time for the summer playing season in 2011. In the summer months, 50 - 60 presentations occur annually here. The new membrane roofs over the stage and spectator areas should enable a versatile use of the open air theater in future, also in case of bad weather. As a result of independence from the weather and the enhanced attractiveness of the venue, as well as through a quantitative increase of the offer, the operators of the venue expect a significant increase in the capacity utilisation and the revenue turnover. Simultaneously, the architecturally impressive structuring of the roof construction should place an additional focus on the venue. The roof cladding will in future act as a projection screen for light effects, and the roof which is lit up in the darkness will be a shining beacon visible from afar.



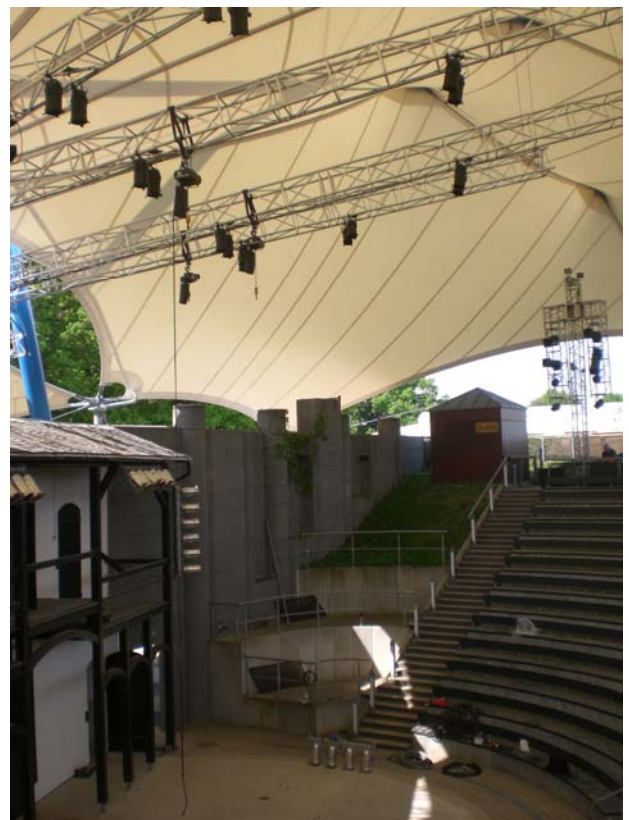

Project data

year of construction	2011
client	City of Senftenberg
general planner / membrane statics	IF Ingenieurgemeinschaft Flächentragwerke
covered area	stand main roof 1,007 sqm stage building roofing 245 sqm entrance roof 33 sqm
material	PVC coated, white, polyester fabric, with acrylic surface-protection painting / flame-retardant in accordance with DIN 4102 B1

